

Data sheet article FE-Q-20-20-03

Technical data and application safety

Webcraft GmbH Industriepark 206 78244 Gottmadingen, Germany

Phone: +49 7731 939 839 1

www.supermagnete.be support@supermagnete.be

1. Technical information


Block magnet 20 x 20 x 3 mm, holds approx. 450 g, ferrite, Y35, no coating

Article ID	FE-Q-20-20-03
EAN	7640155431859
Material	Ferrite
Shape	Block
Size	20 x 20 x 3 mm
Side 1	20 mm(+/- 0,2 mm)
Side 2	20 mm(+/- 0,2 mm)
Side 3	3 mm(+/- 0,1 mm)
Pole faces	20 x 20 mm
Direction of magnetisation	3 mm
Coating	No coating
Manufacturing method	sintered
Magnetisation	Y35
Strength	approx. 450 g (approx. 4,41 N)
Displacement force	approx. 90 g (approx. 0,883 N)
Max. working temperature	250°C
Weight	5,8200 g
Curie temperature	450 °C
Residual magnetism Br	4000-4100 G, 0.40-0.41 T
Coercive field strength bHc	2.20-2.45 kOe, 175-195 kA/m
Coercive field strength iHc	2.26-2.51 kOe, 180-200 kA/m
Energy product (BxH)max	3.8-4.0 MGOe, 30.0-32.0 kJ/m ³

ROHS Product compliant with the latest European RoHS directive.

REACH Product compliant with the latest European REACH regulation.

2. Safety tips

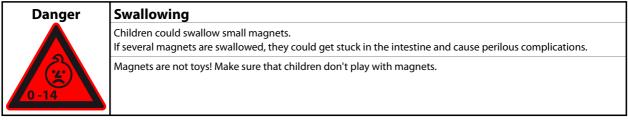

3. Handling and storing

Caution	Magnetic field		
	Magnets produce a far-reaching, strong magnetic field. They could damage TVs and laptops, computer hard drives, credit and ATM cards, data storage media, mechanical watches, hearing aids and speakers.		
<u>/n/</u>	 Keep magnets away from devices and objects that could be damaged by strong magnetic fields. Please refer to our table of recommended distances: www.supermagnete.be/eng/faq/distance 		
Notice	Influence on people		
	According to the current level of knowledge, magnetic fields of permanent magnets do not have a measurable positive or negative influence on people. It is unlikely that permanent magnets constitute a health risk, but it cannot be ruled out entirely.		
•	 For your own safety, avoid constant contact with magnets. Store large magnets at least one metre away from your body. 		
Notice	Temperature resistance		
	Ferrite magnets can be used at temperatures between -40°C and 250°C. At lower and higher temperatures they lose part of their adhesive force permanently.		
	Don't use ferrite magnets in places where they are exposed to temperatures below -40°C or above 250°C.		
Notice	Mechanical treatment		
	Ferrite magnets are brittle. When drilling or sawing a magnet with improper tools, the magnet may break.		
	Stay away from mechanical treatment of magnets if you do not possess the necessary equipment and		

4. Transportation tips

Caution	Airfreight
Λ	Magnetic fields of improperly packaged magnets could influence airplane navigation devices. In the worst case it could lead to an accident.
	 Airfreight magnets only in packaging with sufficient magnetic shielding. Please refer to the respective regulations: www.supermagnete.be/eng/faq/airfreight
Caution	Postage
	Magnetic fields of improperly packaged magnets could cause disturbances in sorting machines and damage fragile goods in other packages.
	 Please refer to our shipping tips: www.supermagnete.be/eng/faq/shipping Use a large box and place the magnet in the middle surrounded by lots of padding material.

Use a large box and place the magnet in the middle surrounded by lots of padding ma
Arrange magnets in a package in a way that the magnetic fields neutralise each other.
If necessary, use sheet iron to shield the magnetic field.
There are stricter rules for airfreight: Refer to the warning notice "Airfreight".

TARIC-Code: 8505 1910 90 0

Origin: China

For more information about magnets please review **https://www.supermagnete.be/eng/faqs**.

Last update: 18/04/2024